# Mansion Weave Parquet 011



Images are a guide; natural wood varies. Please order a sample.

## OVERVIEW


| | |
|---|---|
| Species | European oak |
| Colour & surface | European Oak, deep smoked, eco oil, eco hard-wax oil |
| Collection | Mansion Weave Parquet Flooring |

## SPECIFICATIONS

| | |
|---|---|
| Species | European Oak |
| Finish | Eco friendly Oil and Hardwax Oil |
| Construction | Engineered Oak |
| Thickness | 16mm or 21mm |
| Width | 240mm hexagonal block / 90mm weave strip |
| Length | 367mm hexagonal block (135° corners) / 350mm weave strip (45° cut ends) |
| Pattern | hexagonal blocks interlaced with diagonal weave strips – see the dimension drawing |
| Structure | Engineered, 16mm (4mm top layer) or 21mm (6mm top layer) |
| Edges | 4 sides micro bevels or 4 side square edges |
| Jointing system | Tongue and Groove |
| Grade | Rustic, Classic, Select |
| Surface | Finish Dependant |
| Finish/Colour | can be made to any colour you can find on our website |
| Colour variation | (grade and finish dependent) |
| Underfloor Heating Suitable | Yes |

- Bespoke mansion weave sizes are available upon request.

## PATTERN & DIMENSIONS

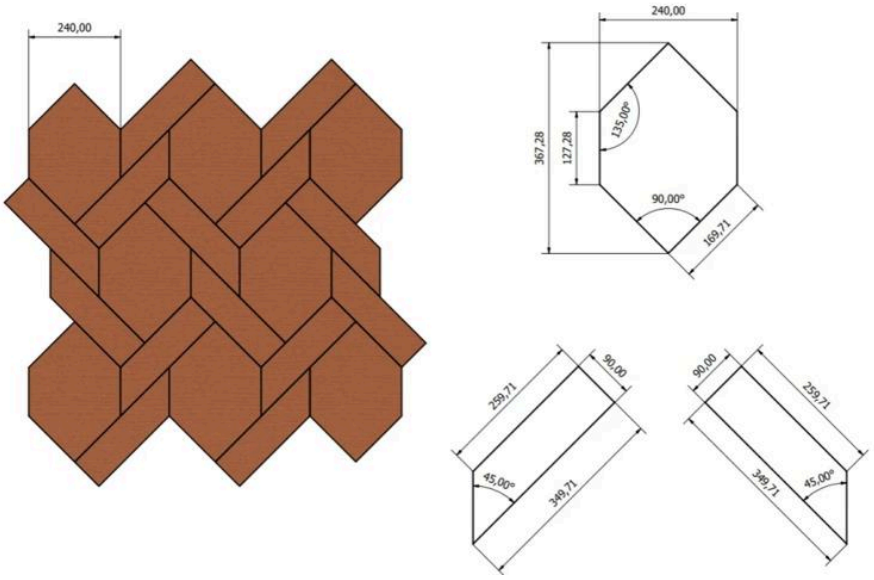


Dimensions in mm. Hexagonal block 240 × 367 mm with 135° corners; weave strips 90 mm wide and 350 mm long (260 mm on the short edge) with 45° cut ends. Thickness 16 mm (4 mm top layer) or 21 mm (6 mm top layer). Bespoke mansion weave sizes are available upon request.

## GRADES

| | |
|---|---|
| Rustic | The most characterful grade: no restriction on colour variation, sound knots in any number, sapwood allowed; larger knots and natural cracks are filled with colour-matched filler. |
| Classic | A natural, balanced look: moderate colour variation, sound knots of moderate size and number, some sapwood; filled where needed. |
| Select | A calm, more uniform appearance: limited colour variation, mostly free from knots with only small, isolated sound knots (filled with matching filler). |

Natural wood varies from board to board and batch to batch. Grade photos and samples are a guide; see www.hoffparquet.co.uk/wood-flooring-grades.html.

## DESIGN OPTIONS FOR PARQUET

- Brass inlay – a fine 3 mm or 5 mm brushed solid brass line to frame the parquet field, separate rooms or create panels (Brass Inlay 15 × 3 mm and 14 × 5 mm, 3 m lengths).
- Wide plank border – a perimeter border of bespoke wide oak planks around the herringbone or chevron field, mitred at the corners.
- Contrasting wood inlay – a single or double border, band or feature in a different colour or species, such as walnut in oak or a darker stain.
- Bespoke sizes – block widths, lengths and angles made to order to suit the room and the design.

## STAIR SOLUTIONS

Matching stair nosings, treads and risers are made in the same wood and finish as this floor.



### Square edge nosing

A crisp, modern nose that finishes flush with the riser. Edges are lightly bevelled so the line stays sharp but comfortable underfoot.



### Square nosing, softened edge

The same flush square nose with a small rounded edge, softer to the touch and more resistant to knocks on busy stairs.



### Full bullnose

A traditional fully rounded nose that overhangs the riser – the classic choice for Victorian and Georgian staircases.



### Overhang nosing, rounded corners

An overhanging nose with a flat face and gently rounded corners – a lighter, contemporary take on the bullnose.



### Bespoke treads and risers

Solid or engineered treads, risers, landings and stringers made to measure in any of our woods, grades and finishes.

## FLOOR PROFILES & THRESHOLDS

Solid oak profiles made to the exact height of your floor, unfinished or stained to match (colours 001–040).



### Ramp profile

Slopes gently from the wood floor down to a lower floor such as vinyl, tile or a door threshold, so there is no trip edge.



### Flat threshold

A slim flat bar that covers the joint between two floors of the same height – ideal for doorways between rooms.



### T-bar threshold

A T-shaped profile whose stem sits in the expansion gap between two floors of equal height, allowing both floors to move freely.



### Wood to carpet profile

Finishes the edge where wood flooring meets carpet, with a lip that holds the carpet neatly in place.



### L-shape end profile

An L-shaped edge that wraps the end of the floor where it meets a step, a glass door or a lower level.

## INSTALLATION

| | |
|---|---|
| Before fitting | Acclimatise the boards in the room for at least 72 hours. The subfloor must be clean, dry and level; moisture-test screeds before installation. |
| Method | Fully bonded to the subfloor with a suitable flooring adhesive. |
| Underfloor heating | Suitable when fully bonded. Floor surface temperature must not exceed 27°C. |
| Guides | Step-by-step installation guides: www.hoffparquet.co.uk/wood-flooring-installation-guides.html |

## CARE & MAINTENANCE

| | |
|---|---|
| Daily | Sweep or vacuum with a soft floor-brush attachment (no rotating brush). Use felt pads under furniture and mats at entrances. |
| Cleaning | Damp mop (well wrung) with a pH-neutral cleaner for oiled and hard-wax oiled floors, such as Hoff Parquet "Floor Care" Wood Floor Cleaner. No steam mops or vinegar. |
| Maintenance | Refresh with a maintenance oil or "Floor Care" Wax Refresher every 8–12 months at home, more often in busy commercial areas. |
| Full guide | www.hoffparquet.co.uk/cleaning-and-maintenance-instructions.html |

## SAMPLES & ORDERING

| | |
|---|---|
| Samples | 10 × 10 cm £2.00 + VAT · 20 × 40 cm £25.00 + VAT. Sample cost is deducted from your full order. Order online: www.hoffparquet.co.uk/store/p791/Mansion_Weave_Parquet_011.html |
| Quotation | Supply only or supply and installation across Edinburgh, Glasgow, London and the UK. Free quotations and site visits in Edinburgh and the surrounding areas. |
| Trade | Architects, interior designers and developers: ask about our trade programme and complimentary samples. |
| Certification | Timber from FSC® and PEFC™ certified sources, compliant with UK and EU Timber Regulations. |